




# HIGH DEFINITION SONIC LOGGING TOOL (HDSL)

GOWell's **High Definition Sonic Logging Tool (HDSL)** is part of the Gallop Suite and it is comprised of a single transmitter and five receivers. The instrument provides a borehole compensated acoustic compressional travel time (Dt). Applications include porosity calculations, and calibration of seismic data. It can also be used for cement bond evaluation.

The sonic logging tool's integrated DtC travel time is used to improve seismic time-depth correlation and it serves as an important input to geomechanics evaluations.

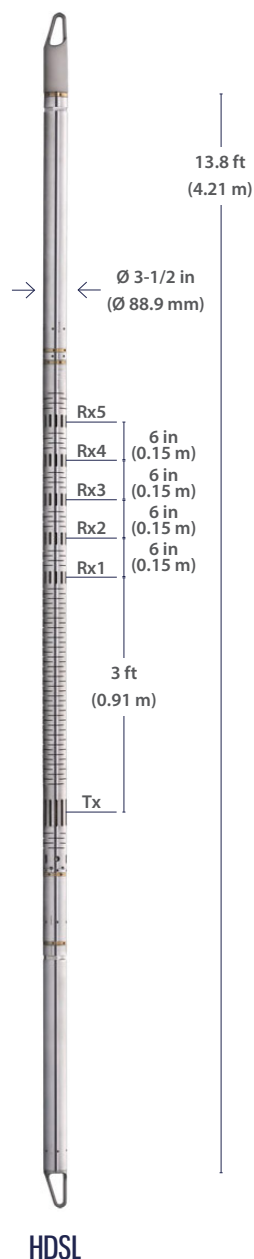

## FEATURES

- Combinable with other Gallop tools
- Acquires full digital Compressional waveforms in both OH (5 Rx) and CH (2 Rx CBL) modes configurable by software
- Real-time semblance available
- Travel time DTC processing real time, including borehole compensation

## APPLICATIONS

- Formation Porosity
- Seismic Correlation
- Basic Cement Bond evaluation in cased hole
- Fracture Identification
- Basic Geomechanics


HDSL BODY





# HIGH DEFINITION SONIC LOGGING TOOL (HDSL)

## LOG EXAMPLE

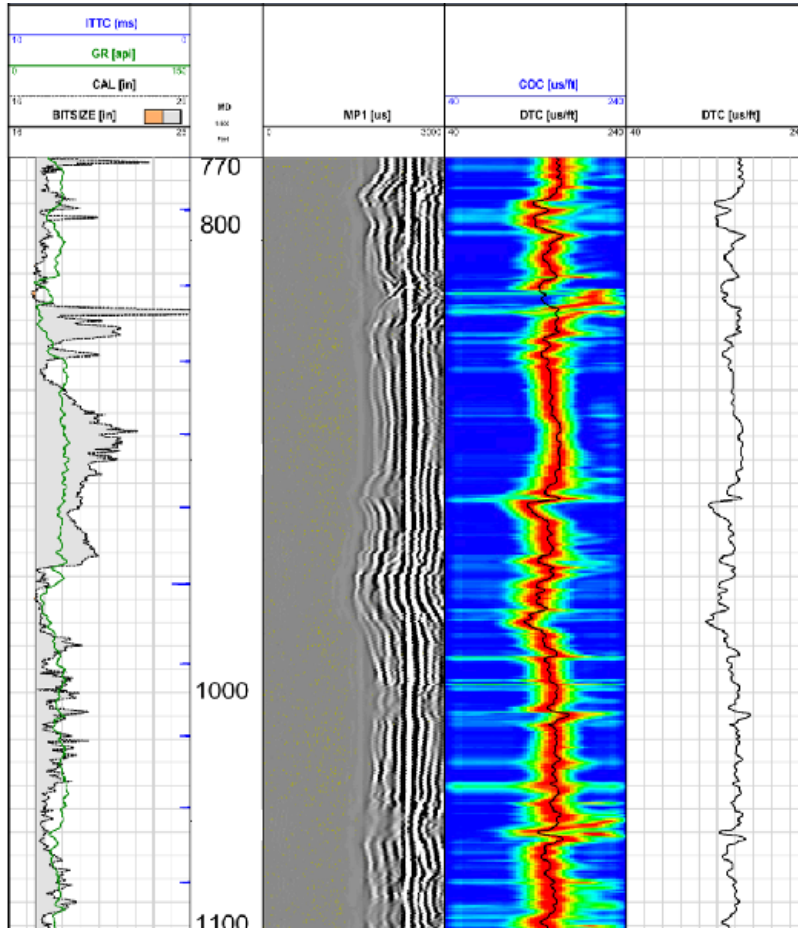



# HIGH DEFINITION SONIC LOGGING TOOL (HDSL)

## SPECIFICATIONS

	HDSL
<b>GENERAL SPECS</b>	
Maximum Pressure	20,000 PSI (140 MPa)
Maximum Temperature	350 °F (175°C)
Maximum Hole Size	16 in (406.4 mm)
Minimum Hole Size	4.5 in (114.3 mm)
Diameter	3-1/2 in (88.9 mm)
Length	13.8 ft (4.2 m)
Weight	278 lbs (126 kg)
Max. Logging Speed	43.7 ft/min (13.3 m/min)
<b>BOREHOLE CONDITIONS</b>	
Borehole Fluids	Any liquid
Tool Position	Centralized
<b>HARDWARE FEATURES</b>	
Voltage	220 Vac, 50 Hz
Current	60 mA
Transmitter Type	25 KHz Piezoelectric Ceramic Transducer
Sampling Rate	10, 20, 40 samples/m selectable
<b>MEASUREMENT</b>	
Principle	Sonic Slowness and Amplitude
Minimum	130 us/m
Maximum	630 us/m
Vertical Resolution	5.9 in. (15 cm) (DTC Curve)
Depth of Investigation	2 in (50 mm)
Accuracy	±2 us/m
Primary Curves	DTC, DTH, CBL, VDL